

Recessed (Wall) Service Outlet Quick-Connect Puritan Bennett Type

Silbermann designs and manufactures its Terminal Units to last and ensure a constant and reliable medical gas flow for the patient, medical staff and maintenance staff.

All outlets are 100 % tested for flow, leakage and are cleaned for oxygen services prior to shipping.

Our outlets are designed by professional designers to ensure an appealing and pleasant environment for the patient and the medical staff.



Features

- Accepts **Puritan Bennett** type gas specific adapters.
- All outlets are 100% hydrostatic tested for leaks. The outlets are factory assembled, degreased and cleaned for medical gas service.
- Indexed to eliminate interchangeability of gas services.
- 360° swivel inlet pipe for ease of installation.
- Low maintenance due to use of VITON seals in front assembly (latch value).
- Modular singles - designed to provide ganging of rough-in modules in the field to form multiples at any order with 120mm spacing.

Medical Gas System Standards:

- NFPA99 requirements.

Applicable Standards:

- ISO 9170-1.

Silbermann's Quality Management System:

- CE marked by the notified body TÜV-SÜD.




Technical Data

- The medical gas outlet shall be **SILBERMANN Puritan Bennett** type manufactured according to ISO 9170-1.
- The outlet shall be gas specific by indexing each front service panel to a gas specific pin indexed rough-in module.
- The outlet of positive and negative pressure shall consist of a primary and secondary check valves to allow testing and on-line maintenance.
- Outlet shall be manufactured with 175 mm long, type K, 12.7 mm (1/2") OD copper pipe. Rough-in pipe shall be silver brazed to the outlet body.
- With the rough-in mounted, the outlet shall be depth adjustable to compensate for various wall thicknesses.
- The quick connect outlet shall comply with ISO 9170-1 standard type and accept only corresponding Puritan Bennett gas specific adapter.
- Pressure drop of less than 20 Kpa through the outlet at 120 LPM and 350 Kpa (3.5 Bar) inlet pressure.
- When fully open, the outlet allows a flow of up to 600LPM and pressure of 400 KPa (4 Bars).



Dimensions [mm]

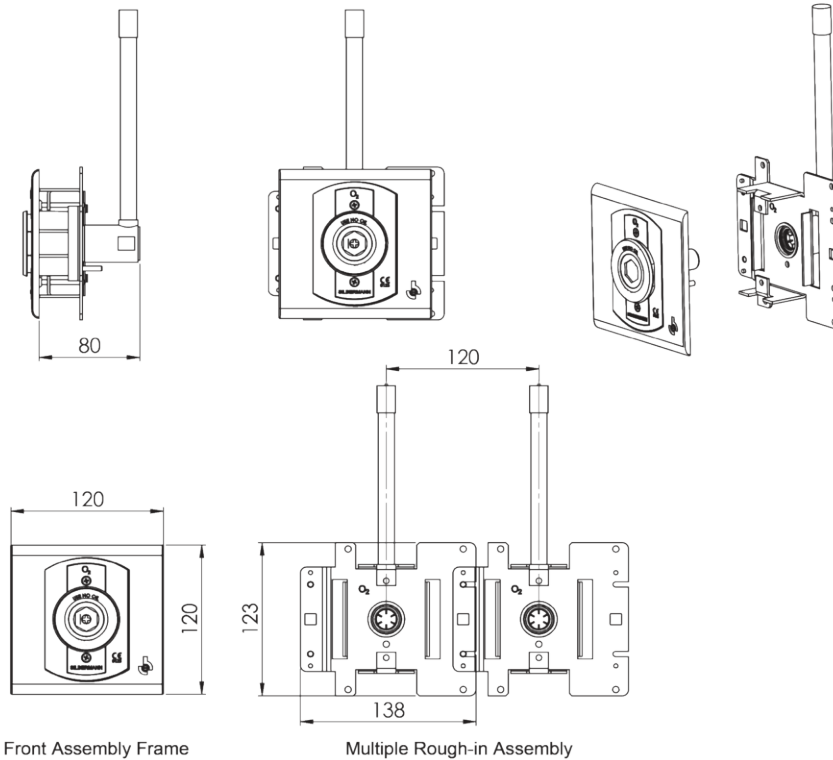

Front Assembly Frame

Multiple Rough-in Assembly



Catalogue Numbers

Gas Service	Color Code	Catalogue No.
Oxygen	Green	3776353
Medical Air	Yellow	3776354
Nitrous-Oxide	Blue	3776369
Vacuum	White	3776355

* Other gas services available on request

Distributed By: